



## Acrylastic™ UltraRoof™ 900

Provides a waterproof & weatherproof membrane over new or existing roof surfaces

### High Performance Waterproof Protective System

Acrylastic 900 is an ultra-tough, super-waterproofing, alkali-resistant, copolymer elastomeric coating

Davlin's proprietary Acrylastic 900 system has a proven track record since 1983

### Acrylastic 900 Works Great Over:

- Mineral Surface Modified Bitumen
- Smooth Surface Modified Bitumen
- Smooth Surface Built-Up Roof
- Mineral Surface Built-Up Roof
- Granulated Asphaltic Surfaces
- Hot-Mopped Asphalt Cut-Back
- Emulsion Tar and Gravel
- Metal and Galvanized

### The Acrylastic System Creates a Permanent, Liquid-Applied Roof

- Seamless
- Fully Adhered
- Watertight


When combined with UltraRoof 510, the system's high solar reflectance will reduce thermal-mechanical stress and cooling loads. Optionally, a thin glaze coat of Sunshield 3800 will further boost the reflectance and keep the surface extra clean.

Davlin Coatings LLC  
700 Allston Way  
Berkeley, CA 94710 USA  
(800) 709-5919  
sales@davlincoatings.com  
www.davlincoatings.com

made in **USA**  
designed by Davlin in **California**

© 2011 Davlin Coatings LLC Printed in USA 6/11

**Dramatically reduces the cost of re-roofing, no tear-off necessary**  
**Guaranteed performance with Davlin's 5, 10, 15, and 20 year warranties**

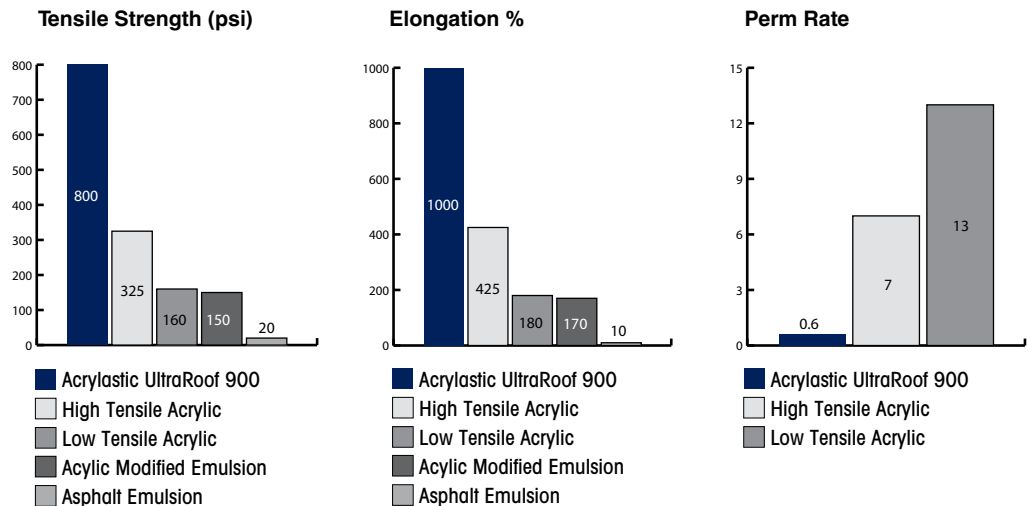

### Save Money

- Light Weight—**Install Over the Existing Roof**
- Restores Existing Roof—**Avoid a Costly Tear-Off**
- Blocks UV—**Stop Roof Deterioration**
- Cures Fast—**Complete the Job Faster**
- More Coverage—**Waterproof at the Lowest Cost**
- Considered Maintenance—**Write-Off Coating This Year**

Due to its light weight, the system can be applied over existing roofs without having to tear them off. Acrylastic 900 has better coverage and waterproofs better than the same amount of acrylic or asphalt. During the spray application, the 900 cures quickly, allowing faster job completion.

**Save Money with Tax Credits** The IRS offers tax credits for reflective coating energy savings and solar power generation. Consult your tax expert for details.

### Extend Your Roof's Waterproofing Life

- Tenacious Adhesion—**Stick Firmly to the Roof**
- High Tensile Strength—**Prevent Breaking**
- Low Perm Rate—**Keep Liquid Out**
- Breathes—**Let Water Vapor Pass**
- Resists Alkali—**Apply in Low-pH Environment**
- Resists Acid—**Withstand Acidic Rain**
- Resists Salts—**Apply Near the Ocean**

Acrylastic 900 creates superior waterproofing, forming a vapor barrier at 0.6 perms. This is more than 3 times better than asphalt, and 10 times better than acrylics. The 900 will minimize problems in ponded areas. Also, the 900 has tenacious adhesion to the substrate, and sticks like an epoxy glue. Unlike asphalt coatings, Acrylastic 900 is UV resistant. It also resists alkali/salt, to extremes of pH of 13, and is highly resistant to acid.

### Protect the Environment

- Few Anti-microbial Additives—**Keep Runoff Clean**
- No Solvents, Low VOC—**Avoid Harmful Fumes**
- Non-Toxic—**Preserve Building Health**

Acrylastic 900 is water-based for easy cleanup and low odor. It contains low VOCs to keep the air healthier for people to breathe. Because of the low perm rate and smooth top coats, Acrylastic systems require few anti-microbial agents. Also, Davlin products contain NO zinc additives and have a low erosion rate, which contributes to cleaner waste-water in our streams, rivers, lakes, and bays.



Earth Friendly Solutions  
for over forty years

Acrylastic 900 is uniquely formulated to protect existing mineral surface capsheet; granulated modified bitumen; hot-mopped, asphalt cut-back or emulsion; tar and gravel; BUR; smooth-surfaced modified bitumen; galvanized metal and pre-cast concrete. The 900 was designed as a single-part water based coating with the highest performance in coastal, temperate, humid, hot, and extreme alkaline environments. Acrylastic 900 creates a tough, long-lasting protective membrane that remains flexible over time, even under adverse conditions. Its elongation and tensile strength provide unsurpassed resistance to maintenance traffic, weather conditions, and wear. Unlike similar generic coatings, Acrylastic 900 is formulated to have exceptional adhesion to a variety of substrates. Its proprietary formula features copolymer elastomeric resins to produce a seamless, flexible, durable membrane that displays exceptional weathering ability and good UV resistance. Acrylastic 900 offers superior waterproofing but still breathes enough to allow trapped moisture vapor to pass through the film, while remaining impervious to exterior water penetration.

**Caution:** If surface and roof temperatures are between 50° - 70°F then Acrylastic 900 may be applied in 1 thick coat of 24 wet mils at a rate of 1.5 gallons per 100 square feet. Do not attempt to apply Acrylastic 900 in thick coats when temperatures are above 70°F, since this could cause coating to skin over quickly on top while the coating underneath remains wet, resulting in blisters. Acrylastic 900 is black and its unique resins allow it to dry faster than gray or white coatings, especially in warm, windy weather. When applying polyester sheeting, be careful to apply coating in small areas at a time to ensure that the coating is still wet enough to embed the sheets. Consult Davlin for special application procedures when the surface or air temperature exceeds 110°F.

Davlin Coatings LLC  
700 Allston Way  
Berkeley, CA 94710 USA  
(800) 709-5919  
sales@davlincoatings.com  
www.davlincoatings.com

made in **USA**  
designed by Davlin in **California**

© 2011 Davlin Coatings LLC Printed in USA 6/11

## Specifications

Property	Test Method	Result at 75°F
Tensile Strength	ASTM D2370, 1 in./min.	800 psi
Tensile Elongation	ASTM D2370, 1 in./min.	1000% at break
Moisture Vapor Transmission	ASTM E96, Proc. B, 20 mils DFT	0.6 perms
Adhesion, concrete	ASTM D413	400 psi (substrate failure)
Salt-Spray Resistance	ASTM D1654	No Rusting
Alkali Resistance	Fed. Spec. TT-C-555B, GSA ex. 1	No Effect
Heat Stability	Fed. Std. 141 [6051], 160°F for 10 days	No Viscosity Change
Resistance to Wind-Driven Rain >100 mph	Fed. Spec. TT-C-555B, 4.4.7 min. 95 mph req.	No Weight Gain
Resistance to Ponded Water		No Blisters, No Film Degradation
Service Temperature		32°-200°F
Volatile Organic Compounds	US EPA Reference Method 24	<50 g/l
Flash Point	SETA	>215°F
Viscosity (Stormer K.U.)	ASTM D562	95-110 KU
Solids by Volume	ASTM D2597	52% +/- 2
Solids by Weight	ASTM D2369	51% +/- 2
Dry Film Thickness (DFT)		8.5 mils @100 ft <sup>2</sup> /gal
Recommended System DFT		16-48 mils total
Components		1
Curing Mechanism		Air Dry
Clean Up		Water
Shelf Life		3 years if properly stored
Packaging		1, 5, 55, 275 gal
Availability		Shipped Nationally & Internationally
Drying time to re-coat		4-8 hours dry through @70°F (21°C)
Application Temperature Air and Surface		50-100°F; 10-38°C
Color		Black

**Installation:** Remove all contaminants and loose material, such as dust, dirt, oil, silicone, release agents, wax, mildew, salt deposits, heavy oxidation, and chalky or loose coating. Check the entire roof surface and thoroughly powerwash it. Do not apply at temperatures below 50°F nor during—nor 24 hours preceding—inclement weather, including rain, fog, mist, or freezing temperatures. PROTECT FROM FREEZING DURING SHIPMENT AND STORAGE. Do not store material at temperatures below 50°F. Flush all equipment with water before use. Stir Acrylastic 900 thoroughly until uniformly blended, but avoid excessive mixing to prevent air entrapment.

**Spray & Roller Application:** Apply a wet coat in even, parallel passes, overlapping each pass 50% to avoid holidays, bare areas, and pinholes. Cross-roll or spray at a right angle to the first pass. Porous concrete will require more than one pass. On rough surfaces, back roll the first coat to ensure that coating is pushed deep into surface. Alternately, thin Acrylastic 900 with 1 quart per gallon to achieve better saturation. Over felt surfaces, thin the base coat to achieve maximum penetration.

Clean equipment with water or water and detergent immediately after use. Apply 1 coat of Acrylastic 900 at 1 gallon per 100 square feet, DFT 8.5 mils. Allow 4-8 hours to dry. Use Rule-of-Thumb test prior to installing the next coat: when one's thumb is pressed firmly to the coating, none of the coating will adhere to the thumb. Apply second, third, and fourth coats, per system specification. For additional durability, roofing granules may be broadcast into the final coating application at the rate of 35-40 lbs per 100 square feet.

**Equipment:** Changes in pressure, tip size, and equipment may be needed for proper spray characteristics.

**Airless:** Standard equipment such as Graco Bulldog Hydra Spray 30 or 45:1 pump with a 0.025- 0.031 inch reversible fluid tip.

**Conventional:** Industrial equipment such as Binks 11:1 Saturn pump or equivalent with air control cut-off, a material hose 3/4 inch ID minimum and an air hose 1/2 inch ID and 50-75 psi air pressure minimum. Heavy mastic spray gun such as Binks 7E2 with 1/4 inch fluid tip or larger and slotted nozzle.

**Brush or Roller:** Suitable for waterborne coating. Multiple coats may be required to achieve specified DFT. Roller nap will vary according to texture of substrate, typically a 3/4 inch nap will work.

The information, ratings, and opinions stated above are, to the best of our knowledge, accurate, representing the results of laboratory and field evaluation. It is presented in good faith to assist the user in determining whether our products are suitable for his application. Since the user's application and other requirements are not known by us or are beyond our control, no warranty or guarantee as to results is hereby made or implied by Davlin Coatings LLC.