



FLUID APPLIED
COOL ROOF SYSTEM

20 YR SYSTEM QUICK SPEC

TPO, MB, or BUR

High Solids (HS) Silicone Coating System

38 Dry Mils

DESCRIPTION

The **RoofSeal Silicone Top (RST)** COOL ROOF RESTORATION SYSTEM for aged TPO, MB, or BUR roofs is an elastomeric coating system comprised of either high solids or lower solids spray grade sil-icone. This high-performance silicone coating system pro-ects the existing roof from the harmful effects of UV, greatly reducing thermal shock and prolonging the life of the roof while helping maintain internal temperatures and reducing cooling costs. It is tested and certified to meet CRRC guide-lines for Title 24 compliance.

BASIC USES

The **RST** COOL ROOF RESTORATION SYSTEM is a tough, durable system designed to extend the life of a wide range of roof top environments from premature weathering and moisture intrusion. It is effective as a protective membrane to coat an entire roof, or to use for spot repair.

FEATURES & BENEFITS

- Prolongs the life of an existing roof surface while helping to lower internal temperatures and reduce cooling costs
- Hydrophobic – highly resistant to water penetration
- High tensile strength and abrasion resistance
- Excellent adhesion to a variety of roof substrates
- Ease of application - extremely fast and simple to install
- Can be used to reinforce and seal seams, penetrations, transitions, terminations, and to make spot repairs
- Economical - extends the life of your existing roof
- Accelerator package is available to shorten cure time
- Can be re-coated up to 7 to 10 days between coats
- UL-790 Class "A" fire resistance rating

WARRANTY

DAVLIN offers two Limited Warranties:

1. Material Only Warranty - No Charge
2. Labor & Material Warranty - For Approved Applicators Only

Fees and other conditions will apply. Consult your DAVLIN representative. See Warranty System Sheet for Wet and Dry Film Thickness Requirements.

REQUIRED MATERIALS

- DAVLIN BLEED BLOCKING Primer
- DAVLIN ROOFSEAL SILICONE TOP
- DAVLIN FABRIC 3 oz.
- DAVLIN SILICONE MASTIC


Consult your DAVLIN representative for project specific requirements

The **RST** System provides tenacious adhesion with an existing roof system to form a monolithic membrane. The result is a CRRC rated system that exceeds all Title 24 requirements.

SYSTEM DESCRIPTION

The **RoofSeal Silicone Top (TST)** system includes

20 YEAR SYSTEM COVERAGE FOR TPO,MB, or BUR ROOFS

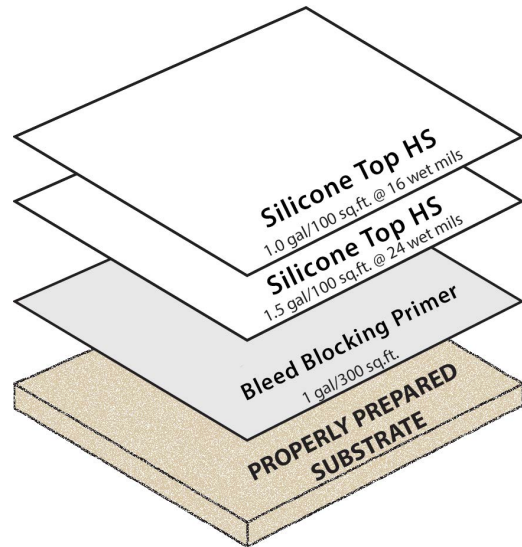

base and top coats to cover and protect your roof:

1. RoofSeal Bleed Blocking Primer is an ultra-tough, waterproofing, copolymer elastomeric coating. The system creates a liquid-applied roof that is permanent, seamless, fully-adhered, and watertight. RoofSeal BBP's prevents asphalt bleed through when applied under Silicone Roof Coatings.
2. DAVLIN SILICONE HS is a single-component, moisture cured, low VOC, elastomeric silicone base and top coat formulated with high volume solids.

STORAGE & HANDLING

Keep containers closed, and store in a dry, cool place away from heat, sparks, open flame, and moisture. Keep material stored above 65°F (18°C) and on wood pallets off concrete floors. Open containers should be blanketed with dry nitrogen before resealing.

ADHESION TEST

To ensure successful application of the **RST** system always perform several adhesion tests (ASTM D-903) with the coating to ensure the roof substrate will accept the coating. Do not proceed with coating system without prior testing.



TECHNICAL DATA

Packaging 	1 gal can 5 gal pail 55 gal drum
Coverage Rate Per Gallon	1.5gal/100sq.ft.=24 wet mils
Color	White, Gray, Tan, Custom Colors
Shelf Life	12 Months (unopened)
PHYSICAL PROPERTIES	
Hardness Shore A, ASTM 2240	45-55
Tensile Strength, ASTM D-2370	300 psi (2.07 Mpa)
Tear Strength, ASTM D-624	45 pli (7.88 N/mm)
Elongation, ASTM D-412	200% ± 15
Specific Gravity	1.32
Total Solids by Weight, ASTM D-2697	96% ± 2
Total Solids by Volume, ASTM D-2697	96% ± 2
Viscosity	10,000-15,000 cps
VOC, ASTM D-2369-81	<50 g/liter (0.40 lbs/gal)
Reflectivity 3 years (White)	0.67
Emissivity 3 years (White)	0.90
SRI 3 years (White)	82

PRE-INSPECTION

Inspect roof for necessary repairs before application of coating system. Inspection should include but not limited to the following:

- HVAC units and flashings
- Ponding water
- Parapet wall conditions
- Wet or damp insulation
- Sign or display anchorage
- Seams, terminations, transitions, and reglets
- Water leakage
- Substrate damage or disrepair
- Proper drainage and obstructions
- Copings and flashings
- Sleepers and pitch pockets

SURFACE PREPARATION

1. Remove all unnecessary and non-functional equipment and debris from the roof.
2. Remove dirt and foreign material detrimental to adhesion or application by thoroughly cleaning all roof surfaces with a high pressure (2,000 - 2,500 psi) (13.79 MPa - 17.24 MPa) wash. Surfaces contaminated with oil, grease, animal fats, etc. must be removed using tri-sodium phosphate and water, or other solutions as required by job conditions and as permitted by local and federal regulations. Remove all cleaning solutions with plenty of fresh water and allow to dry.
3. Membranes with seam and flashing failures must be repaired by traditional and professional roofing practices. Tighten and/or replace all existing fasteners, install crickets and complete metal sheet work repairs.
4. Prime all areas with DAVLIN Bleed Blocking Primer and allow to cure. Detail all roof penetrations, skylights,

rake edges, round projections, machine legs, sign posts, guide wire straps, inside and outside corners, gutters, joints, pipes, voids, protrusions and any areas where water could enter through the roof with DAVLIN SILICONE MASTIC and FABRIC embedded in between layers of wet resin. Clean and seal all drain areas water-tight. Webseal may be used where necessary.

5. On all seams apply DAVLIN SILICONE MASTIC at a rate of 3.0 gallons per 100 sf @ 50 wet mils minimum and embed FABRIC in between layers of wet resin. DAVLIN SILICONE MASTIC shall extend a minimum of 2 inches on both sides of seam.
Allow prepared surfaces to become tack free before proceeding with additional priming or coating application. Note: Thickness values of cured film are averages and can vary due to finish of surface. ALWAYS CHECK THE WEATHER PRIOR TO APPLICATION. Depending on the ambient and substrate temperatures, relative humidity, and dew point precautions should be taken when applying materials if precipitation or freezing temperatures are anticipated. Consult product data sheets. Do not apply over wet insulation or related materials.

COATING APPLICATION

1. Apply DAVLIN Bleed Blocking Primer to the substrate at a theoretical coverage rate of 1/3 gal per 100 sf @ 5 wet mils and allow to cure.
2. Apply base coat of **RST HS** at the rate of 1.5 gallons per 100 sf @ 24 wet mils and allow to cure. Apply coat
3. of **RST HS** top coat at the rate of 1.0 gallons per 100 sf @ 16 wet mils to yield a total of 38 dry mils of coverage (minimum requirement for 20-year warranty). Actual required application rate will depend on system specified and length of warranty.

DO NOT EXCEED 2.0 GALLONS PER 100 SF PER APPLICATION of ROOFSEAL SILICONE TOP HS. This could cause blisters and/or pinholes. Care should be taken to avoid sagging, pinholes, and runs of the coating on vertical, horizontal, and slanted surfaces to prevent sagging. Application rate may need adjusting if coating starts to sag on verticals or higher slopes. Allow base coat and/or top coat to dry 24 hours between coats. Additional coats may be required to achieve required mil thickness. DAVLIN SILICONE Accelerator may added to speed cure time in cool or dry conditions. Actual required application rate will depend on system specified and length of warranty.

Protection: After completion of application, do not allow traffic on coated surfaces for a period of at least 48 hours at 75°F and 50% R.H., or until completely cured.

EQUIPMENT

Spray Applied - See DAVLIN's Spray Application Guide.

Dipped and Rolled - Brushes of various sizes and a 3/8" nap roller should be used when applying on smooth surfaces such as metal.